


# WLB92



## Industrial LED Light Bar

- Improve worker productivity and ergonomics with bright, high-quality, uniform light
- Avoid damage and nuisance repairs with a rugged metal housing and shatterproof cover
- Save maintenance time and lower utilities expenses with long-life, energy-efficient LEDs

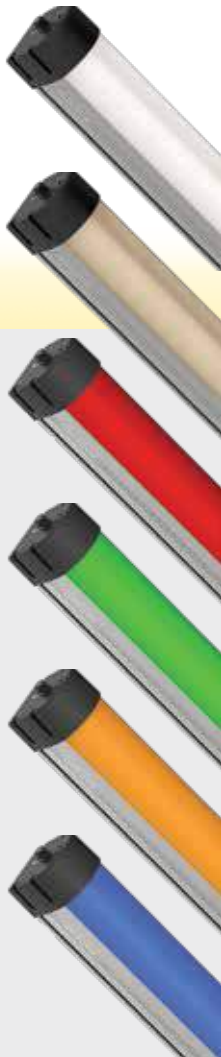

# Advanced LED lighting for your factory, flexibility for you.

With the WLB92, there are a variety of mounting options, ac and dc models and dimming functions available to suit your lighting needs.

AC or DC models available with a variety of connection options

Choose from two lengths: 550 or 1100 mm

Dimming knob (optional) allows you to customize light levels

Rugged, anodized aluminum housing

Side and rear mounting slots entire lighted length

Impact-resistant, light-diffusing polycarbonate window for even light output

7150 lumen output @ 110 lumens/watt (1100 mm model)





Models available with industry-standard conduit knockouts for continuous run and permanent installations




DC models with integrated M12 connector



## DC Models



## AC Models

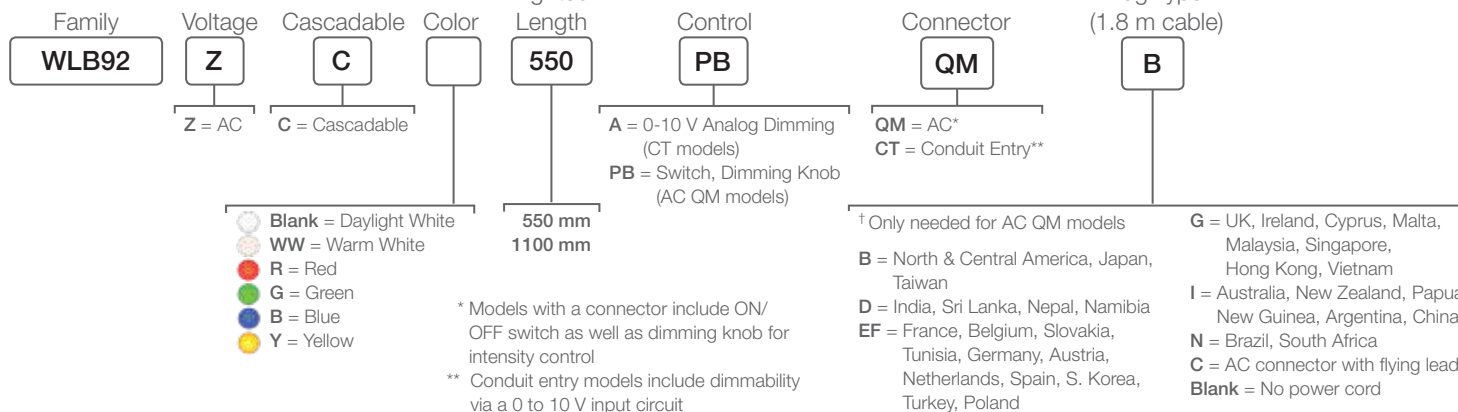

<b>Operating Voltage</b>	24 V dc (dc models) 100 to 277 V ac (ac models)
<b>Construction</b>	Housing: Anodized aluminum Window: Polycarbonate
<b>LED Lifetime</b>	L70 = 50,000 hours
<b>Color Temperature</b>	Daylight White — 5000 k Warm White — 3000 k
<b>Environmental Rating</b>	IEC IP40
<b>Certifications</b>	

## Accessories



LMBWLB92



LMBWLB92CLIP



LMBWLB92HK5



LMBWLB92S



LMBWLB92RAS

**AC Power Cordset 1.8 m (6')**  
for use with models using QM connector



<b>LQMAC-306</b>	Flying Leads
<b>LQMAC-306B</b>	North & Central America, Japan, Taiwan
<b>LQMAC-306D</b>	India, Sri Lanka, Nepal, Namibia
<b>LQMAC-306EF</b>	France, Belgium, Slovakia, Tunisia, Germany, Austria, Netherlands, Spain, S. Korea, Turkey, Poland
<b>LQMAC-306G</b>	UK, Ireland, Cyprus, Malta, Malaysia, Singapore, Hong Kong, Vietnam
<b>LQMAC-306I</b>	Australia, New Zealand, Papua New Guinea, Argentina, China
<b>LQMAC-306N</b>	Brazil, South Africa



**Double-ended Cascading**  
Male straight/Male straight

<b>LQMAEC-3005SS</b>	0.15 m (0.5')
<b>LQMAEC-301SS</b>	0.31 m (1.0')
<b>LQMAEC-303SS</b>	0.91 m (3.0')

### DC Cordsets

**4-Pin M12/ Euro-Style**  
Straight connector models listed; for right-angle, add RA to the end of the model number (example, MQDC-406RA)



<b>MQDC-406</b>	2 m (6.5')
<b>MQDC-415</b>	5 m (15')
<b>MQDC-430</b>	9 m (30')

**4-Pin M12/Euro-Style**  
Splitter

**CSB-M1241M1241**  
0.3 m (1') male trunk;  
2 x 0.3 m (1') female branches

